WEBER-HYDRAULIK

Mechanical manual overrides

Models

110510_manual_overrides
07/2018

Characteristics

- The manual override applies directly to the magnet anchor
- Lockable or non-lockable version available
- Lockable variants are used for mechanical basic adjustment of the valve
- Use in the event of faults or set up

NOTE The manual overrides with which the various proportional valves are available are specified in the type code for the relevant valve.

NOTE The illustrations are examples to illustrate the model of the manual override. The connection to the magnet may vary depending on the valve size.

Manual override with pin NH (H402)

- Not lockable
- For actuation, use a pointed object to push the internal pin in
- When released, the pin returns to its start position
- Not suitable for permanent control

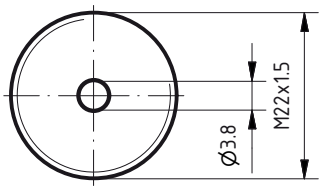

HE4/124818

Manual override with pushbutton

DNH (H405)

- Not lockable
- Spring return
- Push the pushbutton in to actuate
- When released, the pushbutton returns to its start position
- Not suitable for permanent control

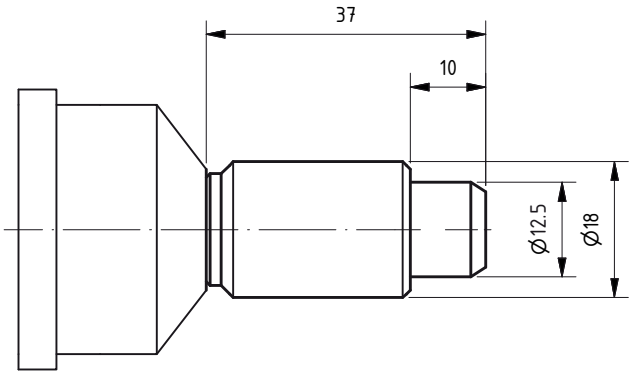

HM4/143014

Manual override with hexagon socket and lock nut

FNH (H301)

- Lockable using hexagonal screw
- Suitable for basic adjustment

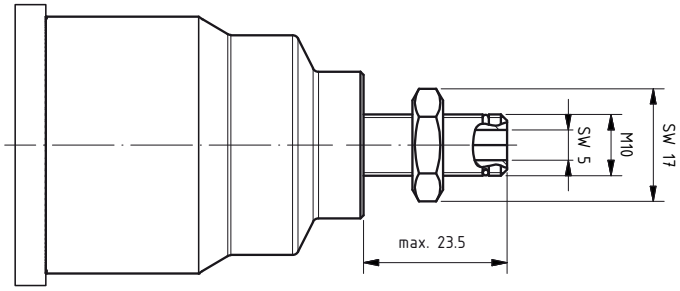

HE4/151906

Manual override with hand wheel and lock nut

H302

- Lockable using hand wheel
- Suitable for basic adjustment

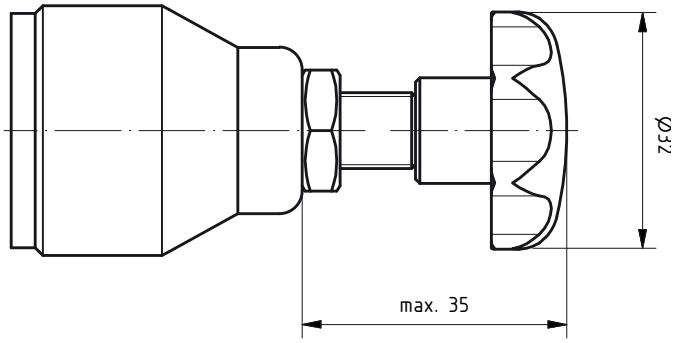

HM4/143010

WEBER-HYDRAULIK ValveTech GmbH
Felix-Wankel-Str. 4, 78467 Konstanz, Germany
Phone: +49 7531 9748-0
Fax: +49 7531 9748-44
www.weber-hydraulik.com
info.de-k@weber-hydraulik.com

Subject to changes